



PROFESSIONAL HD 40

GENERAL FEATURES

Aluminium 6082-T6 alloy Truss, main tube \varnothing 50 x 3 mm, diagonal tube \varnothing 25 x 2 mm.

COUPLING SYSTEM

Double trunk-conical shaped spigot, quick pin and "R" clip are the best solution for high loading capacities. The wide range of accessories makes the product versatile both in a professional sphere and in situations where endusers need to rig heavy equipments (service organizers and show business operators).

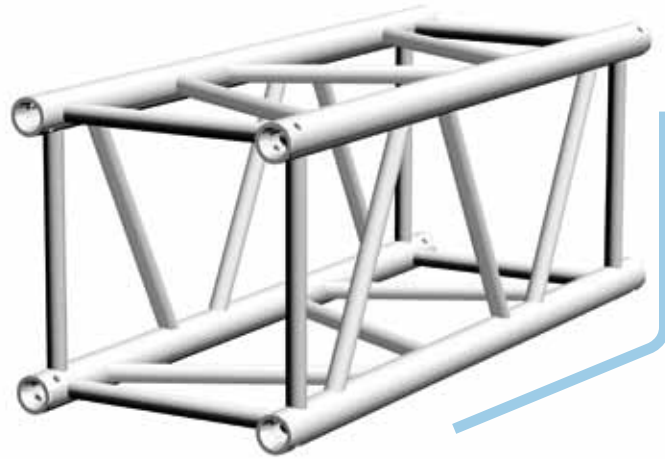

TB 4000
Professional
coupling Set




TA 4001
Professional
double-conical spigot

TA 4006
Professional quick pin



TA 8009
"R" clip 2 mm



TRUSS LENGTH	CODE	WEIGHT	DESCRIPTION
0,5 m	TB 44405	8,15 kg	Professional HD 40 Square Truss - 0,5 m
1,0 m	TB 44410	10,35 kg	Professional HD 40 Square Truss - 1,0 m
1,5 m	TB 44415	14,10 kg	Professional HD 40 Square Truss - 1,5 m
2,0 m	TB 44420	17,20 kg	Professional HD 40 Square Truss - 2,0 m
2,5 m	TB 44425	20,70 kg	Professional HD 40 Square Truss - 2,5 m
3,0 m	TB 44430	24,07 kg	Professional HD 40 Square Truss - 3,0 m
3,5 m	TB 44435	27,20 kg	Professional HD 40 Square Truss - 3,5 m
4,0 m	TB 44440	30,10 kg	Professional HD 40 Square Truss - 4,0 m

LOADING FIGURES

TRUSS LENGTH	POINT LOAD	DISTRIBUTED LOAD
	▲	▲▲▲▲▲
4 m	1500	700
6 m	1494	466
8 m	1096	274
10 m	851	170
12 m	684	114
14 m	560	80
16 m	464	58